

ENDO-MATE DT Standard Pack



ENDO-MATE DT Standard Pack

MODEL	ORDER CODE
ENDO-MATE DT (120V)	Y141-120
ENDO-MATE DT (230V)	Y141-121

- Control unit
- Motor and cord
- MP-F20R head (20:1)
- Handpiece stand
- AC adaptor

ENDO-MATE DT Standard Pack Without Head


MODEL	ORDER CODE
ENDO-MATE DT W/O (120V)	Y141-123
ENDO-MATE DT W/O (230V)	Y141-124

- Control unit
- Motor and cord
- Handpiece stand
- AC adaptor
- * ENDO-MATE DT pack without Head

Specifications

- Power supply: AC120V or 230V 50/60 Hz and Battery pack
- Number of Program: 9
- Max Torque: 7Ncm (when using 20:1 head)
- Speed range: 100~13,000min⁻¹ (with 20:1,4:1,1:1 geared heads)
- Charge/Continuous use: 5h/2h (depending on workload)
- Dimensions: W92xD148xH124mm
- Weight: Unit 456g / Motor handpiece & cord 92g

[Push type]



MODEL	ORDER CODE
○ MP-F20R	Y110-044
● MP-F16R	Y110-096

- Miniature Head
- 20:1 / 16:1 Reduction
- For Ni-Ti files (ø2.35)
- Push Button Chuck



MODEL	ORDER CODE
○ MPA-F20R	Y110-045
● MPA-F16R	Y110-097

- Miniature Head
- 20:1 / 16:1 Reduction
- For Ni-Ti files (ø2.35)
- Push Button Chuck
- Connection for Apex locator (for long shank)



MODEL	ORDER CODE
○ MPAS-F20R	Y110-046
● MPAS-F16R	Y110-098

- Miniature Head
- 20:1 / 16:1 Reduction
- For Ni-Ti files (ø2.35)
- Push Button Chuck
- Connection for Apex locator (for short shank)

[Latch type]



MODEL	ORDER CODE
● NML-F16R	Y110-019

- Miniature Head
- 16:1 Reduction
- For Ni-Ti files (ø2.35)

The icons shown beside each of the models indicate the reduction gear ratio of the head. All heads pictured in this brochure are the 20:1 model type.
White = 20:1 Reduction
Green = 16:1 Reduction

ENDO-MATE DT Motor & Cord



MODEL	PRODUCTS	ORDER CODE
ENDO-MATE DT Unit		U421-002
ENDO-MATE DT Motor & Cord		E275
ENDO-MATE DT Adaptor		U479-001(120V) U480-001(230V)
Handpiece Stand		Z095-206
FC-15 Foot Control		Z248
Cord For MPA / MPAS		C876-021
Connection Cord Clip		C876-509
Rechargeable Batteries		U421-070
F-Type Spray Nozzle		Z256-090



ENDO MICROMOTOR WITH TORQUE CONTROL

ENDO-MATE DT

smart & portable



Apex Locator Capability


MPA and MPAS heads are equipped with built-in probe ring which enables to use the Apex locator with the ENDO-MATE DT system. By combining an Apex Locator with NSK ENDO-MATE DT, clinicians will be able to perform more accurate root canal preparations. All heads are autoclavable up to 135°C.

2 types of file holders

2 types of file holders are available relevant to the shank length of the file selected.



Attach the Apex Locator Monitor by moving it forward to contact the file. Release by moving away from the file.

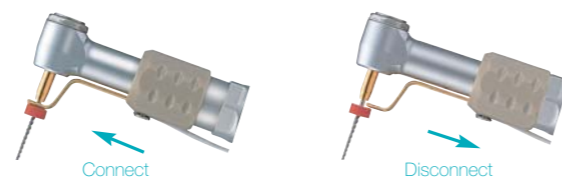

NAKANISHI INC.

www.nsk-inc.com
700 Shimohinata Kanuma-shi
Tochigi 322-8666,
Japan

TEL : +81 (0)289-64-3380
FAX : +81 (0)289-62-5636

NSK Europe GmbH

www.nsk-europe.de
Westerbachstraße 58
D-60489 Frankfurt,
Germany

TEL : +49 (0)69 74 22 99 0
FAX : +49 (0)69 74 22 99 29

NSK United Kingdom Ltd.

www.nsk-uk.com
Office 5, Gateway1000,
Arlington Business Park,
Whittle Way, Stevenage, SG1 2FR, UK

TEL : +44 (0) 1438 310670
FAX : +44 (0) 1438 310671

NSK Oceania Pty Ltd.

www.nsk-inc.com
Unit 22, 198-222 Young St.
Waterloo, Sydney,
NSW 2017 Australia

TEL : +61 (0)2 8306 3000
FAX : +61 (0)2 8306 3030

NSK America - Canadian Branch

www.nsk-inc.com
1054 Centre St. - Suite 283
Thornhill, Ontario, Canada
L4J 8E5

TEL/FAX : +1 905 780 6757
Toll Free : +1 866 780 6757

NSK Middle East

www.nsk-inc.com
Dubai Airport Free Zone,
Room 2W-310,
3F West Wing, Dubai, UAE

TEL : +971 (0)4-299-6644
FAX : +971 (0)4-299-6664




ENDO-MATE DT

ENDO-MATE DT has been developed for use with all brands of Ni-Ti files.

The preprogramming function allows highly efficient treatments using different file manufacturer's procedures. The control unit has been designed to be lightweight and compact. It is fitted with a rechargeable battery providing high mobility. The lightweight and slim handpiece allows high performance.

Lightweight, smart and comfortable handpiece.

6 head angles for ease of treatment



Depending on the position of treatment site, the head angle can be adjusted to the best angle.

2-way ON/OFF switch

Features are :

- A: Push and release
- Micromotor operates continuously until the button is pushed again.
- B: Push and hold
- Micromotor operates continuously until the button is released.



Features of ENDO-MATE DT

1. Fits all popular brands of Ni-Ti files
2. Torque control, with an auto-reverse function
3. Compact desktop unit
4. Wide screen provides high visibility
5. Flat control panel allows simple and user friendly operation
6. 2 way power source (AC cord / rechargeable battery pack)
7. Lightweight, smart and comfortable handpiece
8. Handy on/off switch



* actual size

10.5mm

Push type Ultra miniature head



Allows fast and easy exchange of files during procedures. Compact head offers excellent visibility of treatment spots.

Quick coupling



Quick coupling allows for easy head exchange. All heads are autoclavable up to 135°C.

Fits all popular brands of Ni-Ti files.

Up to 9 settings (speed and torque etc) can be programmed simply by pushing the memory function button.

It's easy to switch between each preset program allowing work with all popular Ni-Ti file manufacturer's required procedures.

Gear	Head Speed(min ⁻¹)
20:1	100-650
16:1	125-800
10:1	200-1,300
4:1	500-3,200
1:1	2,000-13,000

2 way power source

ENDO-MATE DT has been designed to work with a rechargeable battery for portable use or can be powered using the AC adaptor supplied.



Dual ON/OFF control



Motor ON/OFF operation is selected with handy switch located on the handpiece body or foot controller according to user's choice. (Foot controller is optional).

Flat control panel allows simple user friendly operation

Wide screen provides high visibility

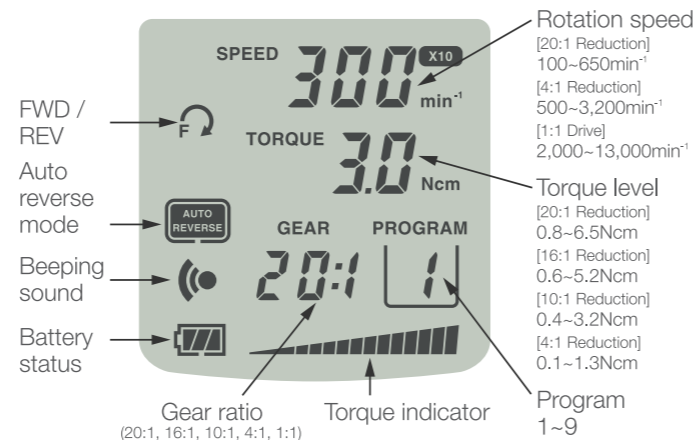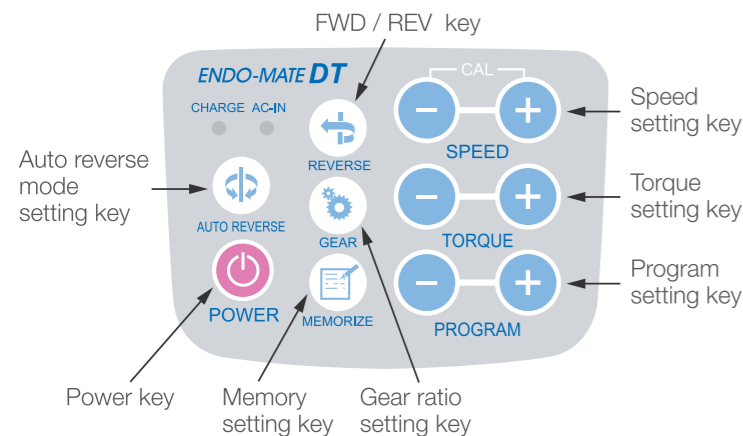

Auto reverse function

The auto reverse function activates when the preset torque level has been exceeded and can be set to operate in the following Modes:



[Continue automatically]

The motor reverts to forward rotation after auto reverse has freed the file.



[Stop automatically]

The motor stops after auto reverse has freed the file.



Alternatively, the auto reverse function can be deactivated.

Other functions

- Beeping sound notifies user when preset torque limit has been exceeded.
- Auto power OFF function (after inactive for 10 mins).
- Battery status is shown on the screen.